


### 一、基本参数

电池容量：1000毫安可充电锂电  
接口类型：type-c  
传输方式：USB有线和博通蓝牙3.0  
尺寸：291mmx101mmx40mm±1mm  
重量：580g±10g  
线材：纯色胶线，总长1.5M  
矩阵：蓝牙模式和有线模式支持全键无冲  
背光：单色发光（17种灯效）  
按键布局：61键紧凑型  
系统要求：Windows2000/WindowsXP/Vista/ Windows 7/ 8/10

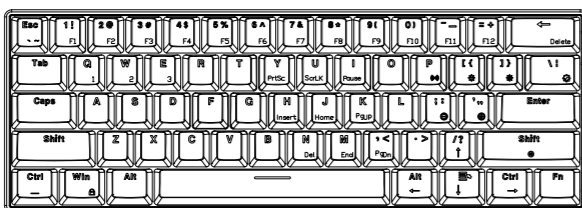

小提示：蓝牙模式下使用若在1分钟内无任何按键操作键盘背光将自动关闭进入节电状态。按下任意按键后唤醒背光。在无按键操作30分钟以后将进入深度休眠蓝牙断开连接，按下任意按键唤醒并且开始回连上一次连接的设备。因蓝牙驱动或电脑等因素再次回连等待时间会有不同。

### 二、按键功能

FN+ESC= ` ~ ( ` ~ 符号需要按FN+左shift+ESC)  
FN+1! =F1      FN+9(=F9      FN+H=INSERT  
FN+2@=F2      FN+0)=F10      FN+J=HOME  
FN+3#=F3      FN+\_ =F11      FN+K=PGUP  
FN+4\$=F4      FN+= +=F12      FN+N=DEL  
FN+5%=F5      FN+删除键=Delete      FN+M=END  
FN+6^=F6      FN+Y=PRTSC      FN+, <=PGDN  
FN+7&=F7      FN+U=SCRLK  
FN+8\*=F8      FN+I=PAUSE

组合按键	实现功能	描述
FN+/?	↑	方向键上
FN+ALT	→	方向键右
FN+APP键	↓	方向键下
FN+右CTRL	→	方向键右
FN+P	蓝牙对码	长按3S后P键灯快速闪烁表示进入对码状态
FN+[({	键盘亮度降低	到最低值为背光关闭
FN+])	键盘亮度增加	到最高值后键盘背光闪烁表示
FN+\\	灯效切换	17组灯光效果
FN+;:	灯效速度减慢	到最低值后键盘背光闪烁表示

组合按键	实现功能	描述
FN+''	灯效速度增快	到最高值后键盘背光闪烁表示
FN+左CTRL	F键区与数字键区切换	默认为数字和符号键功能，切换一次后变更为F键区。
FN+Win	锁窗口	Windows键屏蔽与打开，屏蔽状态下此键背光灯不亮
FN+右shift	锁方向键	屏蔽方向键功能，可用FN+ 对应键触发。
FN+Q	设备1	出厂默认在设备1
FN+W	设备2	整体背光闪烁两次后表示切换到设备2
FN+E	设备3	整体背光闪烁两次后表示切换到设备3
FN+空格	恢复出厂	长按3S后恢复出厂设置

多设备切换操作提示：  
i610T最多支持连接三个不同的设备并记忆到芯片中，切换设备时需要使用FN+Q、W、E来实现设备切换。出厂默认在设备一，如果需要再连接其它设备需要先切换到设备2、设备3后再进行FN+P键进行对码。

### 三、指示灯说明

充电指示灯：空格键红灯常亮，充满后熄灭关闭表示已经充满。  
低电指示灯：FN键闪烁表示需要进行充电  
CAPS键：亮灯表示开启大写

### 四、开关说明

底部开关为有线模式与蓝牙模式功能切换开关，ON档表示进入蓝牙模式。  
OFF档表示关闭电池电源并进入有线模式。进入有线模式后插上typec线材自动转换为有线键盘使用。

A-JAZZ® × NACODEX®

i610T 蓝牙双模机械键盘  
BLUETOOTH DUAL-MODE MECHANICAL KEYBOARD

使用说明书  
User Manual

执行标准号：鼠标GB/T 26245-2010  
键盘GB/T 14081-2010  
耳机GB/T 14471-2013



合格证

质检员：PAS



AJAZZ品牌标志

A-JAZZ 黑爵  
★本凭证为黑爵产品售后服务的重要依据，请您妥善保管。  
★任何产品问题，可扫码咨询微信公众号小编

### 产品质保 (Product Warranty)

感谢您对黑爵产品的信任与支持，为了让您放心使用本产品，更好地保障您的权益，我公司将严格遵守并执行相关规定，实行售后服务。  
1. 服务有效期：自购买之日起质量保证12个月  
2. 服务内容：按微型计算机商品维修更换退货责任规定进行服务  
3. 不属于服务之范围：  
a. 已经超出有效服务或免费维修期的；  
b. 未按照正确使用说明使用、维护、保管导致故障或损坏的；  
c. 非本公司授权维修机构维修导致的故障或损坏；  
d. 质保卡上无经销商资料及盖章之产品；  
e. 擅自涂改三包凭证内容的；  
f. 由于不可抗力(如自然灾害等)原因造成产品之不良；  
g. 人为因素导致产品不良(如操作失误、磕碰、输入不合适电压等)；  
h. 其他非产品设计、技术、制造、质量等问题导致的故障或损坏。


### 质保卡 (Warranty Card)

产品型号：\_\_\_\_\_  
购买日期：\_\_\_\_\_  
客户姓名：\_\_\_\_\_  
联系电话：\_\_\_\_\_  
联系地址：\_\_\_\_\_

制造商：深圳市黑爵同创电子科技有限公司  
地址：深圳市光明新区公明镇马田北路102号A栋2楼  
电话：86-755-2740 7340  
执行标准号：GB/T 14081-2010

### 1. Basic Parameters

Battery: 1000mAh Rechargeable Lithium Battery  
Interface Type: USB-C  
Transmission Mode: USB wired and Bluetooth 3.0  
Dimensions: 291mm x 101mm x 40mm±1mm  
Weight: 580g±10g  
Cable Length: 1.5m  
Backlit: Single color (17modes)  
Keyboard Layout: 61 keys compact layout  
Both Bluetooth and wired modes support N-key rollover function  
System: Windows 7/8/10

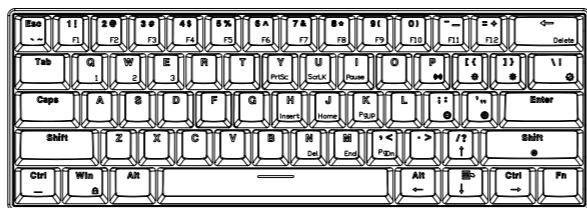

Tips: in Bluetooth mode, the backlight of the keyboard will automatically turn off and enter the power-saving state if no key is pressed within 1 minute. Press any key to wake up the backlight. After 30 minutes of keyless operation, the keyboard will go into deep sleep and Bluetooth will disconnect. Press any key to wake up and start connecting back to the device that was connected last time. The waiting time for reconnecting will be different due to factors such as Bluetooth driver or computer.

### 2. Keys Function

FN+ESC= ` ~ ( ` ~ need to press FN+ Left Shift +ESC)  
FN+1! =F1      FN+9(=F9      FN+H=INSERT  
FN+2@=F2      FN+0)=F10      FN+J=HOME  
FN+3#=F3      FN+\_ =F11      FN+K=PGUP  
FN+4\$=F4      FN+= +=F12      FN+N=DEL  
FN+5%=F5      FN+Delete=Delete      FN+M=END  
FN+6^=F6      FN+Y=PRTSC      FN+, <=PGDN  
FN+7&=F7      FN+U=SCRLK  
FN+8\*=F8      FN+I=PAUSE

Combination Buttons	The Functions	Descriptions
FN+/?	↑	Direction Key Up
FN+ALT	→	Direction Key Left
FN+APP	↓	Direction Key Down
FN+Right Ctrl	→	Direction Key Right
FN+P	Bluetooth Coding	Long press 3S, light of P key flashes quickly to indicate entering the code state
FN+[({	Backlight Brightness Reduction	to the lowest value backlight off
FN+])	Backlight Brightness Increases	to the highest value backlight flashes
FN+\\	Backlight Modes Switching	17 backlight modes
FN+;:	Backlight Speed Reduction	to the lowest value backlight flashes

Combination Buttons	The Functions	Descriptions
FN+''	Backlight Speed Increases	To the highest value backlight flashes
FN+Left Ctrl	Switch Between F Keys and Number Keys	Default number keys, press once to F keys
FN+WIN	Lock Windows Key	Lock and open Win key, backlit of the key does not light under the lock state
FN+Right Shift	Lock Direction Keys	Lock direction keys, trigger by FN + the corresponding key
FN+Q	Device 1	Default device 1
FN+W	Device 2	Two flashes of the overall backlight indicate switching to device 2
FN+E	Device 3	Two flashes of the overall backlight indicate switching to device 3
FN+Space	Restore Factory Settings	Long press 3s to restore factory settings

Operation Tips for Multi-Device Switching  
i610T supports up to three different devices connected and memorized into the chip. USE FN+Q,W,E to switch devices. Default device 1, if you need to connect other devices, you need to switch to device 2 or device 3, and press FN+P to code.

### 3. Indicator Light Description

Charging Indicator: The red light of the space key is always on. When the keyboard is full, the light will turn off.  
Low Electricity indicator: The light of FN key flashes indicates the keyboard needs charging.  
CAPS Key: The light indicates that capital is on.

### 4. Switch Description

The bottom switch is the mode switch between wired mode and Bluetooth mode. ON indicates entering Bluetooth mode. OFF means to turn off battery power and enter wired mode. After entering wired mode, insert USB-C cable and automatically convert it into wired keyboard.